


# GL30MEU

LTE Cat M1/NB2 Micro Real-Time Asset Tracker

- BLE 5.2
- Small Size
- Wi-Fi Scan

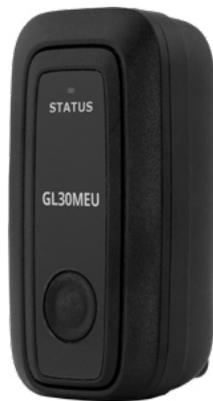

- LTE CAT M1/NB2 Fallback 2G
- IP67 Waterproof
- Neighbor Cell Info Report (Location)
- Function Button
- Internal Buzzer
- Up to 10,000 Buffer Messages
- Motion Detection
- Low Power Alarm
- Battery Level Report
- Supports OTA Update

GL30MEU is a micro real-time tracker with LTE Cat M1/NB2 and 2G fallback. It is designed for diverse applications requiring accurate location tracking, such as personal safety, animal management, asset monitoring, and package delivery.

## Applications

### Asset Monitoring



### Personal Safety



### Pet Tracking



### Sports Tracking



1. The standby time is estimated under the condition of operating with LTE Cat M1/NB2 and the CSQ is greater than 15, working at a constant ambient temperature of 25°C, where GNSS signal is strong enough and under open sky.  
 2. The battery life estimation is based on LTE Cat M1 Connectivity and may be influenced by several factors such as network coverage, ambient temperature, sensors'setting, peripherals, installation location and orientation, etc. If you're interested in power consumption calculation of our device, please contact with our sales or FAE to get more information.

## General Specifications

<b>Dimensions</b>	60x31.7x19.66mm 2.36x1.25x0.77inch
<b>Weight</b>	37.6g(1.33oz)
<b>Internal Battery</b>	Li-Polymer 650mAh (Rechargeable Battery)
<b>Standby Time</b>	Continue Mode 5 Min Reporting: 5 days 10 Min Reporting: 8 days Power Saving Mode 1 Report per Hour: 16 days 1 Report per Day: 190 days ** eMTC, UDP, WIFI & BLE off, GPS open sky, LTE Cat M1/NB2 CSQ>15, operation temperature 10 °C ~25 °C
<b>Charging Voltage</b>	5V DC
<b>Waterproof</b>	IP67 compliant
<b>Operating Temperature</b>	-20 °C ~ +60 °C -20 °C ~ +60 °C for storag
<b>Buffer Messages</b>	Up to 10,000 buffer messages
<b>Sensor</b>	Built-in 3-axis Accelerometer
<b>Region</b>	EMEA
<b>Certification</b>	CE(Planning)

## Connectivity

<b>Technology</b>	BLE 5.2
<b>Frequency</b>	2.4GHz
<b>Technology</b>	Wi-Fi
<b>Frequency</b>	2.4GHz
<b>Remark</b>	Wi-Fi scanning for in-door positioning or triggering mode switch

## LTE Specifications

<b>Frequency</b>	Cat M1: LTE FDD:B1/B3/B8/B20/B28 Cat NB2: LTE FDD:B1/B3/B8/B20/B28
<b>Data Transmission</b>	eMTC (DL) 588kbps eMTC (UL) 1119kbps NB2 (DL) 127kbps NB2 (UL) 158.5kbps NB1 (DL) 34kbps NB1 (UL) 66.6kbps

## EGPRS Specifications

<b>Frequency</b>	EGPRS: 900/1800MHz
<b>Data Transmission</b>	EDGE: (DL) 296 Kbps (UL) 236.8 Kbps GPRS: (DL) 107 Kbps (UL) 85.6 Kbps

## GNSS Specifications

<b>GNSS Type</b>	All-in-One receiver
<b>Constellation Support</b>	GPS, Glonass, Galileo, Beidou
<b>Sensitivity</b>	Autonomous: -148 dBm Hot start: -163 dBm Tracking: -165dBm
<b>Position Accuracy (CEP)</b>	Autonomous: < 2.0m
<b>TTF (Open Sky)</b>	Cold start: 24s average Hot start: 1s average

## Interfaces

<b>LTE Antenna</b>	Internal only
<b>GNSS Antenna</b>	Internal only
<b>BLE Antenna</b>	Internal only
<b>Wi-Fi Antenna</b>	Internal only
<b>LED Indicator</b>	One RGB LED (CELL, Power, GNSS)
<b>Function Button</b>	One Activation/Alarm Key
<b>I/O Interface</b>	5pin magnetic suction interface 2pin for charging 3pin for I/O (can be used for Download and Debug)
<b>Buzzer</b>	Metal Patch Buzzer
<b>SIM</b>	eSIM chip (MFF2 ESIM)

## Working Mode

<b>Continuous Mode</b>	11 days @one report per minute, 2 Working hours per day Up to 15 days @ one report per hour
<b>Sleeping Mode</b>	Up to 170 days @ one report per day

## Air Interface Protocol

<b>Transmit Protocol</b>	TCP, UDP, SMS
<b>Low Power Alarm</b>	Alarm when internal battery is low
<b>Power On/Off Report</b>	Report when the device is powered on and off
<b>SOS Alarm</b>	SOS alarm via pressing function button
<b>Command Set</b>	@Track protocol command
<b>Working Modes</b>	Power saving mode for long standby time Continuous mode for emergency tracking
<b>Scheduled Timing Report</b>	Report messages at preset time intervals
<b>Geo-Fence Report</b>	Support up to 20 internal geo-fence regions Automatically reports when entering / exiting Geo-Fence
<b>Motion Detection</b>	Motion alarm based on internal 3-axis accelerometer
<b>OTA Support</b>	Remote configure parameters to change position interval, measurement interval, active/ deactivate sensor, upgrade FW