



Antenna_GPS_SMA_3M

User Guide

For GV300 Devices

ACCEAAG300UG001



<http://www.queclink.com>
sales@queclink.com

Document Title	Antenna_GPS_SMA_3M User Guide
Version	1.00
Date	2012-06-15
Status	Release
Document Control ID	ACCEAAG300UG001

Contents

Contents	2
0. Revision history	3
1. General Description	4
2. General Specification	5
2.1. Appearance	5
2.2. Operating Condition	5
2.3. Storage Condition	5
3. Electrical Specification	6
3.1. Patch	6
3.2. Filter / LNA	6
4. Dimensions	7

0. Revision history

Revision	Date	Author	Description of change
1.00	2012-06-15	Cid Xu	Initial

1. General Description

Antenna_GPS_SMA_3M is a GPS Active Antenna with SMA type RF connector. The cable length is 3m.

2. General Specification

2.1. Appearance

Antenna Unit (with radome, connector, and cable – refer to an attached drawing)

Dimensions	37.5*34.5*12.5mm ;	Radome	#D
Weight	62±5g(typ);	Connector	SMA PLUG
Cable	RG-174 3m		

2.2. Operating Condition

Temperature	-40 to +90℃
Humidity	10 to 95% RH

2.3. Storage Condition

Temperature	-40 to +90℃
Humidity	10 to 95% RH

3. Electrical Specification

* All value are defined at $25 \pm 15^{\circ}\text{C}$, $65 \pm 20\%\text{RH}$, power handling 1 u watt, air pressure 960 ± 100 HPA unless otherwise notes.

* Patch characteristics are measured with 70x70 mm ground plane in an anechoic chamber.


3.1. Patch

Characteristics	Specification
Center Frequency	1575.42 MHz (when covered with a radome and measured by 70*70mm ground plane)
Bandwidth(10dB return loss)	10 MHz min
Gain at Zenith	5.0 dBic typ
Gain at 10° elevation	- 1.0 dBic min
Polarization	R.H.C.P
Axial Ratio	3.0 dB typ

3.2. Filter / LNA

Characteristics	Specification
Center Frequency	1575.42 MHz
Gain	27 ± 3 dB
Noise Figure	1.5 dB typ
Filter Out band attenuation	7dB TYP $f_o \pm 20\text{MHz}$ 20dB TYP $f_o \pm 50\text{MHz}$ 30dB TYP $f_o \pm 100\text{MHz}$ ($f_o=1575.42\text{MHz}$)
Output V.S.W.R	2.0 max
Voltage (3.3V)	DC = $3.3 \pm 0.6\text{V}$
Current (3.3V)	12mA TYP 15mA max

4. Dimensions

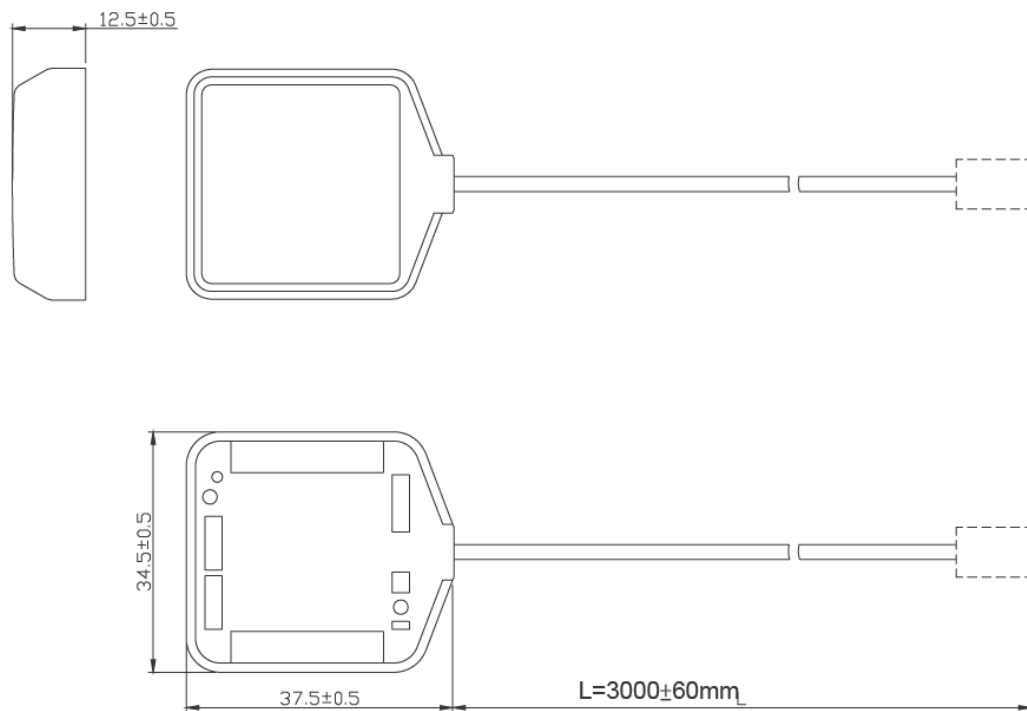

Connector Appearance: SMA PLUG

