

# L3 Managed Industrial Switch

FNS420-416TF4-TGB-8P-SFP-A



## Introduction

FNS420-416TF4-TGB-8P-SFP-A is a high performance 10G SFP+ L3 core POE switch. It provides Static routing and dynamic routing with advanced hardware processing capacity. Supports up to 4 Port 10G SFP+, and retains the expansion ability to further support 10GE when realizing gigabit convergence or access. It supports IPv4/IPv6 hardware double stack and line speed forwarding, so that customers can easily cope with the coming IPv6 era, which provides high capacity exchange capacity. It has the operating temperature of  $-40^{\circ}\text{C} \sim 75^{\circ}\text{C}$ , has the super firmness to adapt to all kinds of harsh environment, can also be very convenient to install in the machine room cabinet. The rack-mounted characteristics and wide temperature operation make the switch a plug and play industrial-grade device, providing a reliable and convenient solution for users to network their Ethernet devices.



Industrial-grade Design

- ▶ Metal casing,
- ▶ Wide range operating temperature ( $-40^{\circ}\text{C} \sim 75^{\circ}\text{C}$ )



Stability & Reliability

- ▶ Support QoS (IEEE 802.1p/1Q) and TOS/DiffServ to increase network stability



Standard & Convenience

- ▶ Support STP/RSTP/ERPS, SNMPv1/v2/v3 to ensure network security
- ▶ Support DIN rail
- ▶ Support POE (Optional)

# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



High Performance

- ▶ Data control: support 802.3x full duplex flow control, support network storm suppression
- ▶ Redundant network: support STP/RSTP/MSTP, support ERPS (self-healing time <20ms)
- ▶ Support IPv6, static routing, Dynamic routing (RIP,OSPF)
- ▶ Support RIPng, OSPFv3, DHCP Server, DHCP replay, Qos
- ▶ Multicast management: Support IGMP Snooping V1/V2/V3
- ▶ VLAN: support IEEE 802.1q VLAN, effectively isolated broadcast domain
- ▶ Link aggregation: support link static/dynamic aggregation, provide perfect bandwidth utilization
- ▶ QoS: Support COS\DSCP, 4 queues, support WRR\SP scheduling mode
- ▶ Security management: support ACL access control list, support 802.1x, support user classification management
- ▶ Management function: support Web, SNMP management mode
- ▶ Monitoring maintenance: support port mirroring, interface status monitoring, log management
- ▶ Support PTP (1588v2)

# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



### Production Specification

Standard	
Model	FNS420-TGB-A
Item	Content
Ethernet Standard	IEEE 802.3ad, Link aggregation protocol;
	IEEE 802.3,10BASE-T Ethernet;
	IEEE 802.3u, Fast Ethernet standard;
	IEEE 802.3ab, Gigabit Ethernet standard;
	IEEE 802.3z, Gigabit Ethernet fiber standard;
	IEEE 802.3ae, 10G Ethernet standard;
	IEEE 802.3x, full duplex Ethernet Data link layer flow control;
	IEEE 802.3az, IEEE Efficient and Energy Efficient Ethernet Standard
Industry Standard	EMI: FCC Part 15 Subpart B Class A, EN 55022 Class A
	EMC:
	IEC(EN)61000-4-2(ESD): ±6kV Contact discharge, ±8kV Air discharge
	IEC(EN)61000-4-3(RS) : 10V/m(80 ~ 1000MHz)
	IEC(EN)61000-4-4(EFT): ethernet port: ±2kV CM//±1kV DM.
	IEC(EN)61000-4-5(Surge): ethernet port: ±2kV CM//±1kV DM.
	IEC(EN)61000-4-6(Radio frequency conduction) : 3V(10kHz ~ 150kHz),10V(150kHz ~ 80MHz)
	IEC(EN)61000-4-16(Common mode conduction): 30V cont. 300V,1s
	IEC (EN)61000-4-8
	Shock: IEC 60068-2-27
	Freefall: IEC 60068-2-32
	Vibration: IEC 60068-2-6

# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



Switching Characteristics	
Model	FNS420-TGB-A
Item	Content
Buffer Memory	64Mbit
Transmission Method	Store-and-forward
Backplane Bandwidth	598G
Switching Latency	<10μs
MAC Address	32K
Item	Content
Input Voltage	12 to 52V DC , POE: 48 to 57V DC
Access Terminal	Phoenix terminal block
Characteristics	Support dual power supply redundancy
	Support built-in over-current protection
	Support reverse connection protection with 4.0 A
Operating Environment	
Item	Content
Operating Temperature	-40 °C ~75°C
Storage Temperature	-40 °C ~85°C
Relative Humidity	5~95% (Non-condensing))
Interfaces	
Item	Content
SFP Slot	Number: 4-Port 10G SFP+
	Type: 1000BaseFX port (SFP slot),10GBaseFX port (SFP+ slot)
Ethernet Port	Number: 16-Port gigabit RJ45
	Type: RJ45, 10/100/1000M automatic detection, full/half duplex MDI/MDI-X adaptive
Optical Fiber	Support single-mode/multi-mode fiber
	Multi-mode fiber: 550M
	Single-mode optical fiber: 20/40/60/80/100KM
POE Standard (Optional)	
Item	Content
PoE Standard	IEEE802.3af/ IEEE802.3at
PoE Port	1-8 port support PoE
Output Power	Single port maximum power 15.4 W (IEEE 802.3 af)
	30 W (IEEE 802.3 at)

# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



Other	
Model	FNS420-TGB-A
Item	Content
Shell	metal casing
Characteristic	Support the Console, Telnet, SSH, WEB management
	Support SNMP v1 / v2c/v3
Dimension	166 x 137 x68.5mm
Weight	<1Kg
Installation Method	DIN rail
Heat-dissipating Method	Natural cooling, no fan
Redundant Technology	Support STP/RSTP/MSTP
	Support ERPS
Multicast Technology	MLD Snooping v1/v2,Multicast VLAN Registration (MVR)
	IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out
Switching Function	Support the port speed limit
	Support port truck
	Support port flow control
	port VLAN, IEEE 802.1 Q VLAN
	Support broadcast storm suppression
Port Mirroring	Support IPv6 management
	Bidirectional data mirroring based on port
	SP (Strict Priority)
	WFQ (Weighted Fair Queuing)
	WRR (Weighted Round Robin)
QoS	Random Early Detect (RED)
	Weighted Random Early Detection (WRED)
	Head Of Line
	Best-Effort Service
	First come first served
ACL	802.1p
	Cos/Tos, QOS
	Differentiated Service
	Port-based Issuing ACL,ACL based on port and VLAN
	L2 to L4 packet filtering, matching first 80bytes message.
Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range,and VLAN, etc.	


# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



	Support IP ACL, MAC ACL, Vlan ACL, support ACL based on L3 L4
	IP+MAC Port binding
Security	Support IP Source Guard, RP Detection
	Support IEEE 802.1x port verification, support Radius
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
	Supports port-based input/output bandwidth management.
	Supports static routes. IPV6
IP routing	Supports the virtual route redundancy protocol VRRP.
	Dynamic routes such as RIP, RIPng, OSPF, and OSPFv3 are supported.
	Supports configuration file uploading and downloading. Upload the upgrade package.
	Supports factory restore on WEB, Supports the system log function.
	Support Ping 、tracert、 cable detection and other diagnostic functions.
	Supports WEB management (HTTP and HTTPS).
System maintenance	Supports CLI management. Supports Telnet remote management.
	Supports SSH 2.0. Supports SNMP network management.
	Support RMON; Supports NTP clients.
LED	Power: Red, Fiber: Link 2(Green), Ethernet: Yellow Port indicator: POE port, SFP port (Link/ACT)

Dimension (mm): 166 x 137 x68.5mm

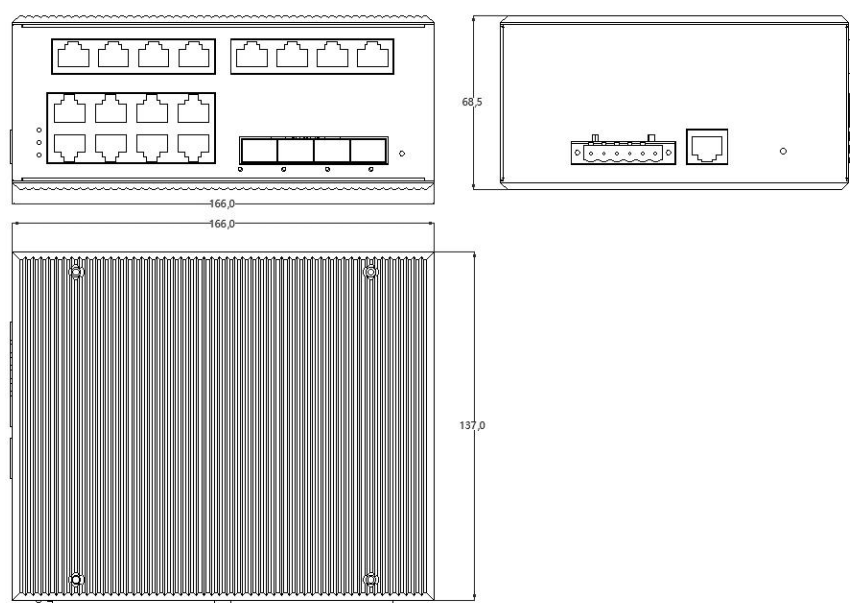

# L3 Managed Industrial Switch

## FNS420-416TF4-TGB-8P-SFP-A



### Order Information

Model	Description
FNS420-416TF4-TGB-8P-SFP-A	L3 Managed Industrial POE Switch:16-Port gigabit RJ45 (8 POE function) + 4-Port 10G SFP, DC48-57V power supply, wide temperature (-40 °C -75 °C), DC 52V/2.3A power adapter